

Electric Performance Report

編號/Class. : SMA805-0D

Date : 2009/05/20


規格/SPEC. : SMA Female Bulkhead for Coaxial Cable

專利/Patent : 正反牙/Anti-slip Annular Section

備註/Notice : SMA Female BH TO IPEX I, 1.32 Cable, L=20cm

S11_VSWR

S11 FORWARD REFLECTION

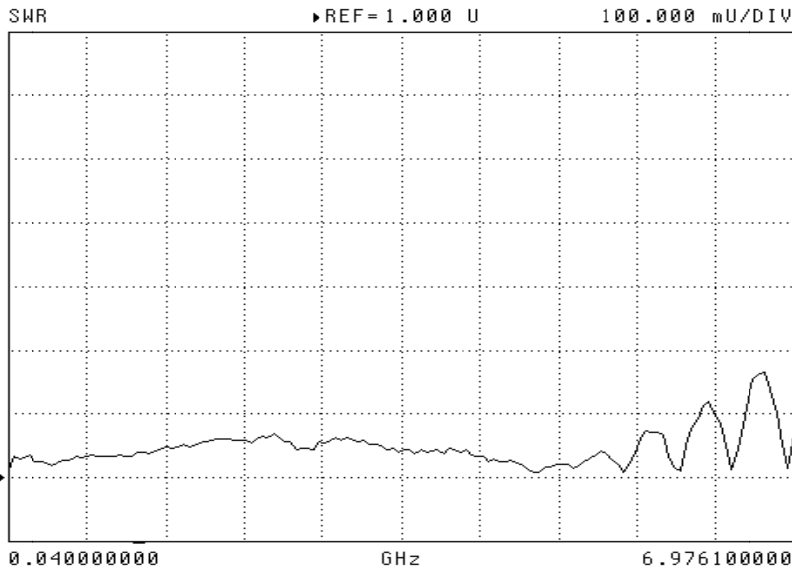

CH 3 - S11
 0.0000 mm REF
 0.000 dB OFFSET
 0.00° OFFSET

▶MARKER 6
 5.978100000 GHz
 1.010 U


MARKER TO MAX
 MARKER TO MIN

- | | | |
|---|-----------------|---------|
| 1 | 0.988100000 GHz | 1.033 U |
| 2 | 1.986100000 GHz | 1.061 U |
| 3 | 2.984100000 GHz | 1.057 U |
| 4 | 3.982100000 GHz | 1.044 U |
| 5 | 4.980100000 GHz | 1.020 U |

MARKER READOUT
 FUNCTIONS

S21_IL

S21 FORWARD TRANSMISSION

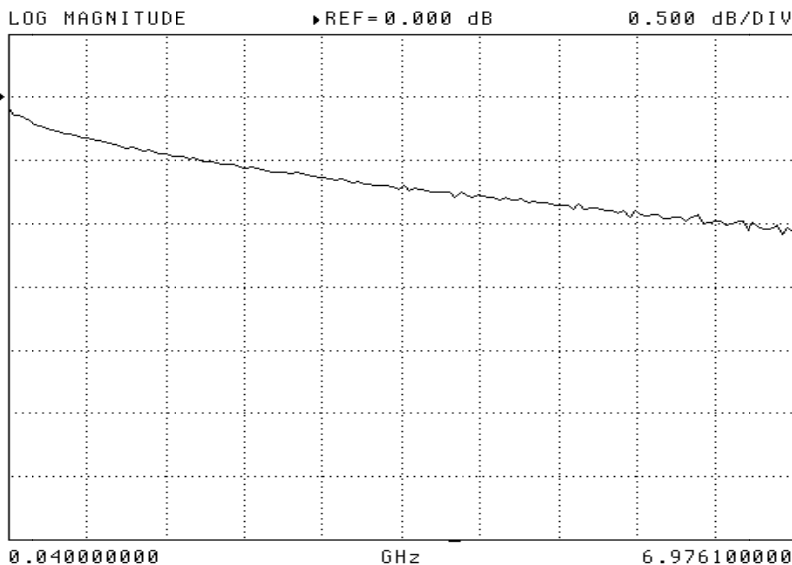

CH 1 - S21
 0.0000 mm REF
 0.000 dB OFFSET
 0.00° OFFSET

▶MARKER 6
 5.978100000 GHz
 -0.950 dB

MARKER TO MAX
 MARKER TO MIN

- | | | |
|---|-----------------|-----------|
| 1 | 0.988100000 GHz | -0.379 dB |
| 2 | 1.986100000 GHz | -0.529 dB |
| 3 | 2.984100000 GHz | -0.647 dB |
| 4 | 3.982100000 GHz | -0.789 dB |
| 5 | 4.980100000 GHz | -0.858 dB |

MARKER READOUT
 FUNCTIONS